

NEW

OMRON

# Miniature Power Relays

MY-GS

1966: MY Relays

1998: MY(S) Relays

## The Reliability of an 800-million Track Record

Models with a Latching Lever Join the MY Family of  
OMRON' s Recent Longtime Best-selling Relays

Relays with Latching Levers

**NEW**



First appearing in 1966, over 800 million MY-series Relays had been manufactured by 2012.

The MY Series grew to meet the needs of the day, and will continue to meet your needs in the future.


# Easier to See, Easier to Use

OMRON insists on inhouse production from component molds to manufacturing facilities to better meet your needs.

## Easily Accessible Information!

### Product Information at a Glance

The model, specifications, and safety standards are all provided on the top surface. You can check this information while the Relay is mounted in the Socket.



### Contact Status at a Glance

Mechanical indicators are now a standard feature so that you know the contact operating status even for standard models.

#### Standard Models



#### Models with Operation Indicators




### Different Looks for Different Specifications

To prevent incorrectly using the Relays, we've made it easy to tell the difference between Relays with different specifications.

The color of the operation indicator (LED) shows whether the coil voltage is AC or DC.



The voltage specification is also shown by the coil tape.

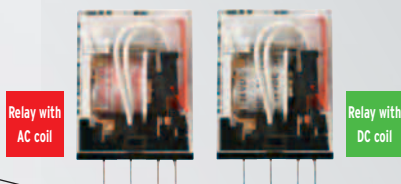

Added a Series with a Latching Lever that is Useful for Operation Check of Relay Sequence Circuits

## Latching lever operating method

		Normal State	Mode 1: Momentary State	Mode 2: Locked State
	When seen from the top			
	When seen from the side			
	Operation Description	—	Slide the lever one step and press the yellow button with an insulated tool to operate the contacts.	If you slide the lever two steps, the contacts lock in the operation position.

Note. According to the mechanism of the latching lever, the contacts are operated forcibly while the coil voltage is not being applied.

# Reliable Application!

## High Durability


High Electrical Durability  
Helps reduce the maintenance frequency.

Two-pole Relay: 500,000 operations

Four-pole Relay: 200,000 operations

Note. For switching the rated load.

Refer to the datasheet for details.



Wide Ambient Operating Temperature  
Reliable application is possible for  
high-density mounting and in cold locations.

Ambient operating  
temperature:  
-55 to 70°C



High Shock Resistance  
Reduces malfunctions for unexpected  
external shocks.

Malfunction shock  
resistance: 20G



## New Design Stable Quality in Automatic Manufacturing

We took 50 years of manufacturing  
experience and designed market  
needs into design and production.

Examples: Connection reliability was  
achieved with welding and  
one-piece molding while  
stable quality was achieved  
in automatic manufacturing.




## There are reasons people continue to choose the MY Series.

The MY Series provides a wide variety of models to ensure that we have just the right model for you.

### Relays That Latch Contacts in the Operation Position




**MYK** Latching Relays

#### ● Operation Chart

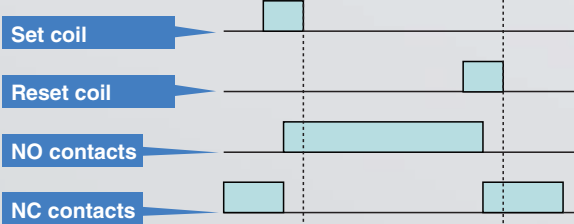

### Relays That Dependably Control Small Loads


**MY4Z** Relays with Bifurcated Contacts  
**MY4Z-CBG** Relays with Bifurcated Crossbar Contacts

Reliability	Contact structure
High ↑	Bifurcated crossbar contacts with Au cladding 
	Bifurcated contacts with Au plating 
	Single contacts with Au plating 



### Relays for Locations with Corrosive Gas or Excessive Dust

**MYQ** Plastic Sealed Relays  
**MYH** Hermetically Sealed Relays

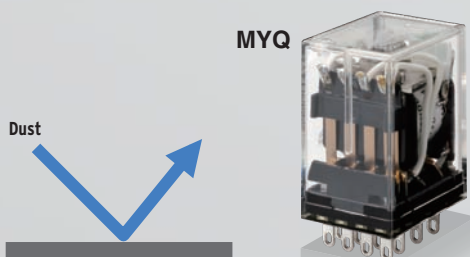

⇒ Refer to the group catalog or your OMRON website for details.











# Ordering Information

## List of Models

Classification	Model		Rated voltage (V)
	2C	4C	
Standard models	MY2-GS	MY4-GS	12 VAC, 24 VAC, 48 VAC, 100/110 VAC, 110/120 VAC, 200/220 VAC, 220/240 VAC 6 VDC, 12 VDC, 24 VDC, 48 VDC, 100/110 VDC
Models with built-in operation indicators	MY2N-GS	MY4N-GS	12 VAC, 24 VAC, 48 VAC, 100/110 VAC, 110/120 VAC, 200/220 VAC, 220/240 VAC 6 VDC, 12 VDC, 24 VDC, 48 VDC, 100/110 VDC, 220 VDC
Models with built-in operation indicators and diodes	MY2N-D2-GS	MY4N-D2-GS	12 VDC, 24 VDC, 48 VDC, 100/110 VDC, 220 VDC
Models with built-in operation indicators and CR circuits	MY2N-CR-GS	MY4N-CR-GS	100/110 VAC, 110/120 VAC, 200/220 VAC, 220/240 VAC
Models with built-in operation indicators having a latching lever	MY2IN-GS	MY4IN-GS	12 VAC, 24 VAC, 48 VAC, 100/110 VAC, 110/120 VAC, 200/220 VAC, 220/240 VAC 6 VDC, 12 VDC, 24 VDC, 48 VDC, 100/110 VDC, 220 VDC
Models with built-in operation indicators having a latching lever, and diodes	MY2IN-D2-GS	MY4IN-D2-GS	12 VDC, 24 VDC, 48 VDC, 100/110 VDC, 220 VDC
Models with built-in operation indicators having a latching lever, and CR circuits	MY2IN-CR-GS	MY4IN-CR-GS	100/110 VAC, 110/120 VAC, 200/220 VAC, 220/240 VAC

## Options (Order Separately)

### Connection Sockets and Hold-down Clips

	Front-mounting Sockets			Back-mounting Sockets
Mounting	DIN Track or screw mounting			PCB mounting
Terminal Type	Screw terminal	Finger protection structure	Push-In Plus Terminal	PCB terminals
MY2-GS MY2N-GS MY2N-D2-GS MY2N-CR-GS MY2IN-GS MY2IN-D2-GS MY2IN-CR-GS	PYF08A-E 	PYF08A-N 	PYF-08-PU 	PY08-02 
MY4-GS MY4N-GS MY4N-D2-GS MY4N-CR-GS MY4IN-GS MY4IN-D2-GS MY4IN-CR-GS	PYF14A-E 	PYF14A-N 	PYF-14-PU 	PY14-02 
Hold-down Clips	PYC-A1		Socket combination	PYC-P

**OMRON Corporation** Industrial Automation Company  
Kyoto, JAPAN

Contact: [www.ia.omron.com](http://www.ia.omron.com)

**OMRON (CHINA) CO., LTD.**  
Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

**OMRON TAIWAN ELECTRONICS INC.**  
6F, Home Young Bldg., No.363,  
Fu-Shing N.Road, Taipei, Taiwan R.O.C  
Tel: (886) 2-2715-3331/Fax: (886) 2-2712-6712

**OMRON ASIA PACIFIC PTE. LTD.**  
No. 438A Alexandra Road # 05-05/08(Lobby 2),  
Alexandra Technopark, Singapore 119967  
Tel: 65-6835-3011/Fax: 65-6835-2711

Authorized Distributor:

© OMRON Corporation 2014-2018 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

CSM\_2\_2\_0318  
Cat. No. J196-E1-03

0318(0414)